

# TECHNICAL DATA SHEET

## CHALK FINISH SPRAY PAINT



### 1. Description


Quick drying water based matt paint. Allows decorating easily multiple surfaces in order to give a vintage touch to your objects.

### 2. Properties:

- Great adherence
- Excellent durability
- It does not yellow
- Matt finish
- Very easy application
- Quick dry
- It can be sanded easily
- Emissions dans l'air intérieur \*

(Décret n°2011-321 du 23 mars 2011) : A+ “très faibles émissions”

*\* La información sobre el nivel de emisión de sustancias volátiles dentro del aire interior, presentan un riesgo de toxicidad por inhalación, en una escala de A+ (emisiones muy bajas) a C (fuertes emisiones)*

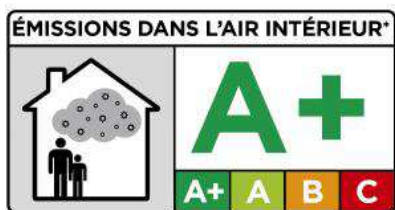

### 3. Recommended uses

Very useful both indoors and outdoors. Ideal to apply on wood, melamine, canvas, iron, plastic, cardboard...

### 4. Presentation

Cans: 520cc/400ml

Colors: Blanco Roto / Crema / Marrón Glacé / Piedra / Rosa Pétalo / Rosa Empolvado / Verde Menta / Azul Índigo / Turquesa Pálido / Turquesa / Gris Ceniza / Negro Plomo

### 5. Technical characteristics:

• Nature	Water-based acrylic resin
• Solvents	Water, alcohol
• Propellant	DME
• Density	1.35 ± 0.01 gr./cc
• Viscosity	60 ± 5 sec. (Ford Cup Nr. 4, 20°C)
• % solids in weight	29,5 % (Theoretical value)
• VOC	606 gr./l (Theoretical value)
• Gloss al 60°	2%
• Coverage	520/400ml: 2 m <sup>2</sup> according to support
• Dry time at 20°C	Superficial: 20 min. Total: 60 minutes To be repainted : After 60 minutes
• Application temperature	From 10 up to 35°C.
• Resistance to heat	Recommended up to 90°C.
• Inflammability	Extremely Flammable
• Pressure	4 bars at 20°C / 8 bars at 50°C
• Cleanliness	Water within the first minutes Afterwards, alcohol
• Life of the product	> 3 years

## 6. Instructions

The surface to be painted should be clean, dry and without any kind of pollutant. Shake the can. Spray at a distance for 25/30 cm. applying thin, quick criss-cross layers. Leave it dry a few minutes between layers. In order to achieve a uniform finish and avoid any dripping, it is advisable to apply two thin layers instead of a thick one. At the end of the application, turn the can upside down and spray until only gas comes out.

Once surface dried, in order to achieve an uniform finish, the surface can be lightly sanded until obtaining the wanted texture.

## 7. Security

The aerosol can features the correspondent security indications which must be followed. For further information please check the Security Data Sheet.

The information provided in the present technical sheet is the result of the research undertaken in our laboratory as well as real experiences based on applications. Nevertheless due to the fact that quite often the products are used in conditions beyond our control, we cannot warranty the good results of the product if the application and use are not the correct ones.



NOVASOL SPRAY S. A.

Polígono Industrial Empalme  
C/ Empalme, 27  
Tel. 977 67 76 05 Fax. 977 67 80 72  
43712 LLORENÇ DEL PENEDÈS (Tarragona)  
[novasol@novasolspray.com](mailto:novasol@novasolspray.com)