

TECHNICAL DATA SHEET

ANIT-RUST WHITE HOUSEHOLD APPLIANCES



1. Description

The Anti-rust White Household Appliances is a gloss quick-dry acrylic enamel, with anti-rust effect and does not yellow. Provides a high resistance outdoors and an excellent adherence on a great variety of surfaces. Without heavy metals.

2. Properties:

- High hiding power and excellent gloss finish
- Good colour and gloss retention
- Excellent resistance outdoors
- Great adherence
- Very easy application and easy repaintable
- It contains neither lead nor chromates
- It does not yellow.
- Emissions dans l'air intérieur (*)



* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

*The information about the level of volatile substances emissions inside a room state a toxicity risk by inhalation, in a scale ranging from A+ (very light emissions) to C (strong emissions)


3. Recommended uses

Specially formulated for retouching and painting household appliances. Recommended to protect and decorate different supports either in industrial, DIY or handicrafts areas.

4. Presentation

Colour: White E101

Cans: 270cc/200ml and 520cc/400ml

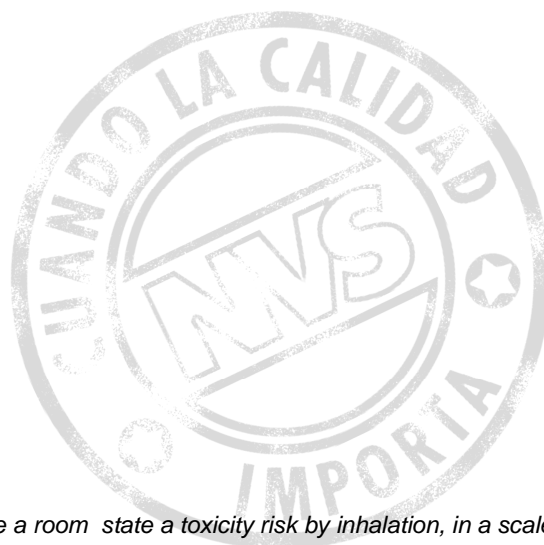

5. Technical characteristics:

- | | |
|---------------------------|--|
| • Nature | Thermoplastic acrylic resin |
| • Pigments | Titanium dioxide and modified zinc phosphate |
| • Solvents | Aromatics |
| • Propellant | DME |
| • Density | 1.01 ± 0.02 gr./cc |
| • Viscosity | 18 – 20 sec. (Copa Ford Nr. 4, 20°C) |
| • % solids in weight | 38 % (Theoretical value) |
| | |
| • VOC | 629 gr./l |
| • Gloss | > 75% |
| • Yield | 270/200ml: 1 m ² according to support |
| Dry time at 20°C: | Superficial: 30 min.
Total: 1 hour
To be repainted : After 5 minutes with the same paint |
| • Application temperature | from 10 up to 35°C. |
| • Resistance to heat | Recommended up to 100°C. |
| • Inflammability | Extremely flammable |
| • Pressure: | 4-5 bars at 20°C / 7-8 bars at 50°C |
| • Cleanliness | Cleaning solvent in spray |
| • Life of the product | > 3 years |

6. Instructions

The surface to be painted should be clean, dry and without any kind of pollutant. Shake the can well during 1 minute after hearing the ball rattles. Spray at a distance for 25/30 cm. applying thin, quick criss-cross layers. Leave it dry a few minutes between layers. We recommend to apply two thin layers instead of a thick one in order to achieve a uniform coating and avoid any paint dripping. At the end of the application, turn the can over and spray until only gas comes out.

7. Security

The aerosol can features the correspondent security indications which must be followed. For further information please check the Security Data Sheet.

The information provided in the present technical sheet is the result of the research undertaken in our

laboratory as well as real experiences based on applications. Nevertheless due to the fact that quite often the products are used in conditions beyond our control, we cannot warranty the good results of the product if the application and use are not the correct ones.



NOVASOL SPRAY S.A.

Polígono Industrial Empalme
Carretera de l'Arboç a Llorenç, Km. 4,7
Tel. 977 67 76 05 Fax. 977 67 80 72
43712 LIORENÇ DEL PENEDÈS (Tarragona)
novasol@novasolspray.com