



NEW GENERATION OF
ENVIRONMENTALLY FRIENDLY
WATER-BASED
FLOORING PRODUCTS

WOOD FLOORING

PARQUET

VENEERED

LAMINATE

STAIRS

1 OLÉOFLOOR®

Waterborne Oil

- Ready to use
- Quick drying - 2 hours
- Wide application temperature - +10°C and +25°C
- Available in 2 finishes - Matt and Waxed Oil
- No polishing required
- Excellent coverage - 15-20 m²/Ltr
- Meets current EU legislation - Less than 5% VOC



2 PRIMAFLOOR®

Waterborne primer for all wooden floors


- Ready to use
- Quick drying - 2 hours
- Wide application temperature - +10°C and +25°C
- Excellent coverage - 10-15 m²/Ltr
- Wide range of colours
- Meets current EU legislation - Less than 5% VOC



3 VEGAFLOR®

Waterborne polyurethane varnish

- Ready to use
- Quick drying
- Odourless
- Excellent coverage - 6-7 m²/Ltr
- Tintable with Primafloor colours
- Meets current EU legislation - Less than 5% VOC

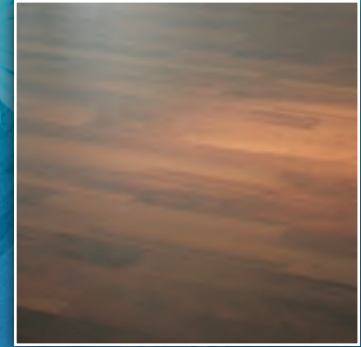

4 SOAPCLEAN

Cleaner for varnished/oiled surfaces


- Ideal for routine cleaning
- Concentrated formula - Highly economical
- Easy to use
- Keeps floors looking like new
- Natural soap cleaner - Cleans all floor types



5 LIANFLOOR®

Waterborne joint filler

- Long lasting flexibility - Will not crack
- Maintains woods natural colour
- Quick drying - 2 hours
- Neutral PH - Unaffected by tannin bleed
- Easy to use and apply
- Meets current EU legislation - Less than 5% VOC

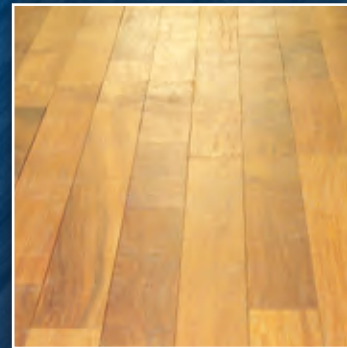



OLEOFLOOR®



WATERBORNE OIL

OLEOFLOOR® is a new water-based oil, which has been developed using vegetable oil and polyurethane resins. Having excellent penetrating qualities, OLEOFLOOR® provides long lasting resistance against wear, chemicals and staining whilst also being water repellent. OLEOFLOOR® is odourless, quick drying and nourishes the wood while giving a matt finish, which enhances the woods natural beauty.

Where to use

OLEOFLOOR® is recommended for all soft and hardwood flooring including exotic hardwood and is ideal for use in all areas, especially kitchens and bathrooms.

Tip: OLEOFLOOR® may be tinted with PRIMAFLOOR® or universal colourants to offer a coloured finish. Always test on a small area first to check colour and uniformity of finish.

COVERAGE	APPLICATION TOOLS	APPLICATION TEMPERATURE	DRYING	RE-COAT	CLEAN-UP
15 - 20 m ² /L		 + 25°C + 10°C	1 - 2 hours*	4 - 12 hours	Immediately after use WATER

* On wood containing large amounts of tannin, wait at least 4 hours.






PRIMAFLOOR®

WATERBORNE PRIMER FOR ALL WOODEN FLOORS

PRIMAFLOOR® is a single pack polyurethane acrylic primer for all new and unfinished or stripped wooden floors. Available in clear and 6 colours PRIMAFLOOR® strengthens the durability and performance of all waterborne varnishes both single and two pack, thereby guaranteeing better performance. Odourless, quick drying and non-yellowing, PRIMAFLOOR® also prevents tannin bleed and avoids glueing of the wood strips and joint by the finish. PRIMAFLOOR® colours can be intermixed or added to the finishing product to achieve the desired look.

Where to use

PRIMAFLOOR® is recommended for all soft and hardwood floors including exotic hardwoods, parquet flooring, veneered (engineered) flooring and staircases.

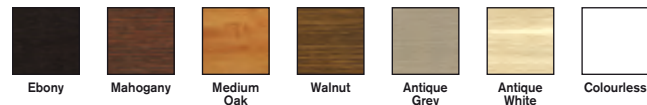

COVERAGE	APPLICATION TOOLS	APPLICATION TEMPERATURE	DRYING	CLEAN-UP
10 - 15 m ² /L		 + 25°C + 10°C	Approx. 2 hours	SOAP & WATER





VEGAFLOOR®

WATERBORNE POLYURETHANE VARNISH

VEGAFLOOR® belongs to the new generation of environmentally friendly, water-based products. It is a single pack waterborne polyurethane resin finish that offers high resistance to both mechanical and chemical wear.

VEGAFLOOR® can be applied to all types of woods that are exposed to normal to intensive wear. It beautifies and maintains the woods natural appearance, dries quickly and is odourless. VEGAFLOOR® is ideal for areas of high water content i.e. bathrooms and may be cleaned with products containing ammonia.

Where to use

VEGAFLOOR® can be used on all soft and hardwood floors including exotic hardwoods, parquet flooring, veneered (engineered) flooring and staircases. It is recommended for new and unfinished wood floors or floors previously finished with a water-based product. On new wood floors, prime with PRIMAFLOOR® before applying VEGAFLOOR®.



Matt



Satin



Gloss

COVERAGE	APPLICATION TOOLS	APPLICATION TEMPERATURE	DRYING	RE-COAT	CLEAN-UP
6 - 7 m ² /L		+ 25°C + 10°C	2 - 3 hours	4 - 12 hours	Immediately after use WATER





SOAPCLEAN



CLEANER FOR VARNISHED/OILED SURFACES

SOAPCLEAN is a gentle, natural soap cleaner, designed for the cleaning of varnished and oiled surfaces. It can also be used for cleaning, traditional lacquered and pre-finished wood floors as well as laminated, veneered, melamine and vinyl flooring. SOAPCLEAN does not leave a film on the surface.

A concentrated formula, which is non-slip and has a pleasant scent, SOAPCLEAN is highly economical to use. Just add 2 capfuls per 10 litres of water

Important!

Newly varnished/oiled surfaces must be left a minimum of 15 days before cleaning with SOAPCLEAN for the first time.

APPLICATION TOOLS	APPLICATION TEMPERATURE	DRYING	CLEAN-UP
	 + 30°C + 18°C	15 to 20 min	WATER







LIANFLOOR®

WATERBORNE JOINT FILLER

LIANFLOOR® is a highly flexible acrylic filler for joints, cracks, holes and other flooring defects. Mixed with sawdust from the final sanding, it maintains the woods natural colour, allowing a superior finish to be achieved while at the same time preventing the finish from bonding across joints. Easy to use, it is quick drying, odourless, non-yellowing and easy to sand. LIANFLOOR® can be stained and used with other varnishes that are compatible with acrylic fillers.

Where to use

LIANFLOOR® can be used on all soft and hardwood floors including exotic hardwoods, parquet flooring, veneered (engineered) flooring and staircases.

COVERAGE	APPLICATION TOOLS	APPLICATION TEMPERATURE	DRYING	CLEAN-UP
According to surface		 + 25°C + 10°C	2 - 3 hours	Immediately after use WATER





OLEOFLOOR®



PRIMAFLOOR®



VEGAFLOOR®



SOAPCLEAN



LIANFLOOR®



Owatrol is a trademark



Owatrol International
08011 Barcelona - Spain
Tel. +34 93 445 17 85

info@owatrol.com
www.owatrol.com
Contact UK: 08450 618 899