



OWATROL ALUMINIUM STAIN RA.85


INTENSE HIGH GLOSS LOOK

USAGE

- Exterior: grills, bars, metallic beams and construction, hulls, tanks, pumps, trailers, pipes etc.
- Interior: machines, pumps, electronic devices etc.
- Horizontal and vertical surfaces.

PROPERTIES

- Anticorrosive aluminium coloured finish.
- Very shiny homogenous look.
- Strong penetrating and wetting power.
- Excellent film qualities such as adherence, flexibility and uniformity, due to the binding properties of OWATROL® OIL.
- Strong resistance against weather and its effects.
- No peeling.
- Resistant up to 175°C.

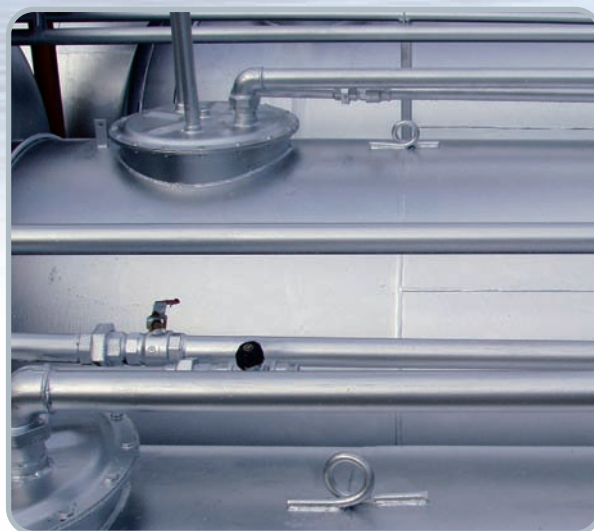

APPLICATION

- Shake well before use.
- Make sure the surface is clean and dry.
- An anticorrosion undercoat is always recommended to avoid interaction between the aluminium pigment and the underlying material.
- Apply one coat of RA.85. If another coat is needed allow 24 h drying between coats.
- RA.85 is based on OWATROL® OIL; therefore dries slowly, allowing an even and shiny film to be formed while maintaining high flexibility.

Note: Do not use directly on new metal (except aluminium). Always apply one coat of OWATROL OIL before to avoid the risk of corrosion between the new metal and the aluminium paint.

COVERAGE RATE 18 m²/l	APPLICATION TOOLS 	TEMPERATURE FOR APPLICATION +35°C +5°C	RESISTANT TO 175°C (DRY FILM)	DRYING TIME 10-20 mins BEFORE USE 24 hours	CLEAN UP WHITE SPIRIT
--	-----------------------	--	-------------------------------	--	---------------------------



Owatrol International SL

C/Aragón 179, 5° - 08011 Barcelona - Spain
Tel: +34 934 51 66 04 - Fax: +34 934 52 14 54
info@owatrol.com - www.owatrol.com