

## Product information | TECHNICAL DATA SHEET

**FLUOR PAINT.** Fluorescent spray paint.  
400 ml, 10.6 Oz, 300 g.

### GENERAL DESCRIPTION

Fluorescent spray paint composed of acrylic resins and thermoplastic copolymers, combined with fluorescent pigments (hypnotic) to produce very bright finishes. Its formula consists of opaque base additives that provide greater coverage and make it possible to work directly on dark backgrounds.

### FEATURES

- Fast drying.
- Very bright colors.
- Easy to apply.
- Resistant in below zero temperatures.
- Does not contain lead nor other heavy metals.
- Can be applied to many materials.
- Can be easily removed with acetone.
- Can be applied to damp surfaces.
- Very low UV resistance.
- Can be varnished with an acrylic varnish.

### INSTRUCTIONS FOR USE


- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces remove rust with a wire brush. Apply an anchor layer on plastics and polyesters.
- To obtain a better, brighter finish, apply a layer of matte white prior to painting.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within ten minutes with the same paint.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

### PHYSICAL PROPERTIES

Binder:	Acrylic thermoplastic
Color:	See chart
Shine:	<10%
Dry to touch (ASTM D-1640 ISO 1517):	5 min
Total drying (ASTM D-1640 ISO 1517):	10 min
Dryfilm thickness (ASTM D-823 ISO 2808):	15 µ/layer
Theoretical yield (pintado en continuo):	2 m <sup>2</sup>
Thinner:	Butyl acetate
Product life:	(Well Stored) 5 years
Heat resistance:	150 °C
Condition for application:	T° min 8°C
	T° surface 5°C-50°C
	Humidity max. 85% R.H.P

Last review's date: 15/11/2014

### COLORS

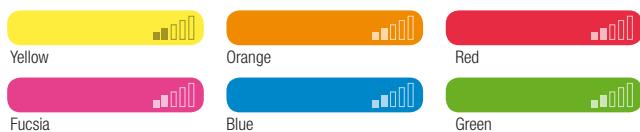

### CAUTION



### APPLICATIONS


Due to the characteristics of this product, we recommend its use for the following applications:

- DIY
- Graffiti
- Construction
- Mining
- Industry
- Topographical signs.
- Geological studies
- Where bright, colorful signage is needed

### APPEARANCE



### LABEL



### CAP SYSTEM



### PACKAGING

Nominal capacity: 400 ml.  
Heat resistance of packaging: <50°C  
Propellant: DME

Box (6 units)  
205 X 140 X 200 mm.

